



TELEHANDLER **1240P**

Miniature Bodywork
Flexible Operation



Lifting Height

4537mm

Rated Load

1500kg

Rated Power

32.4kw

Tyre

10/75-15.3

Wolf Telehandler 1240P

Designed for versatility and productivity, 1240P is a compact telehandler, which is suitable for a variety of applications in agriculture, construction, and industrial sectors.

With Italy PWG hydrostatic transmission, providing efficient and responsive operation.

The 1240P model features a **Yanmar 3TNV86CT** engine producing **32.4kW (45hp)** with a **1500kg load** capacity, the hydraulic flow rate reaches **54 L/min**.

The telescopic boom delivers a maximum lift height of 5280mm with a bucket and 4980mm with pallet forks. From material handling to snow clearing, this telehandler offers a reliable and adaptable solution.

Engine: Yanmar 3TNV86VT 32.4kw/45hp

Emission: Euro V& EPA 4 stage



Wolf Telehandler 1240P

PWG hydrostatic system



Lighting system approval



Rear view Camera



Heating



MP3 radio



Optional Air conditioning



**Intelligent control
precise operation**




**Lockable cabin, tank
and bonnet**



Wolf Telehandler 1240P

Technical Parameter

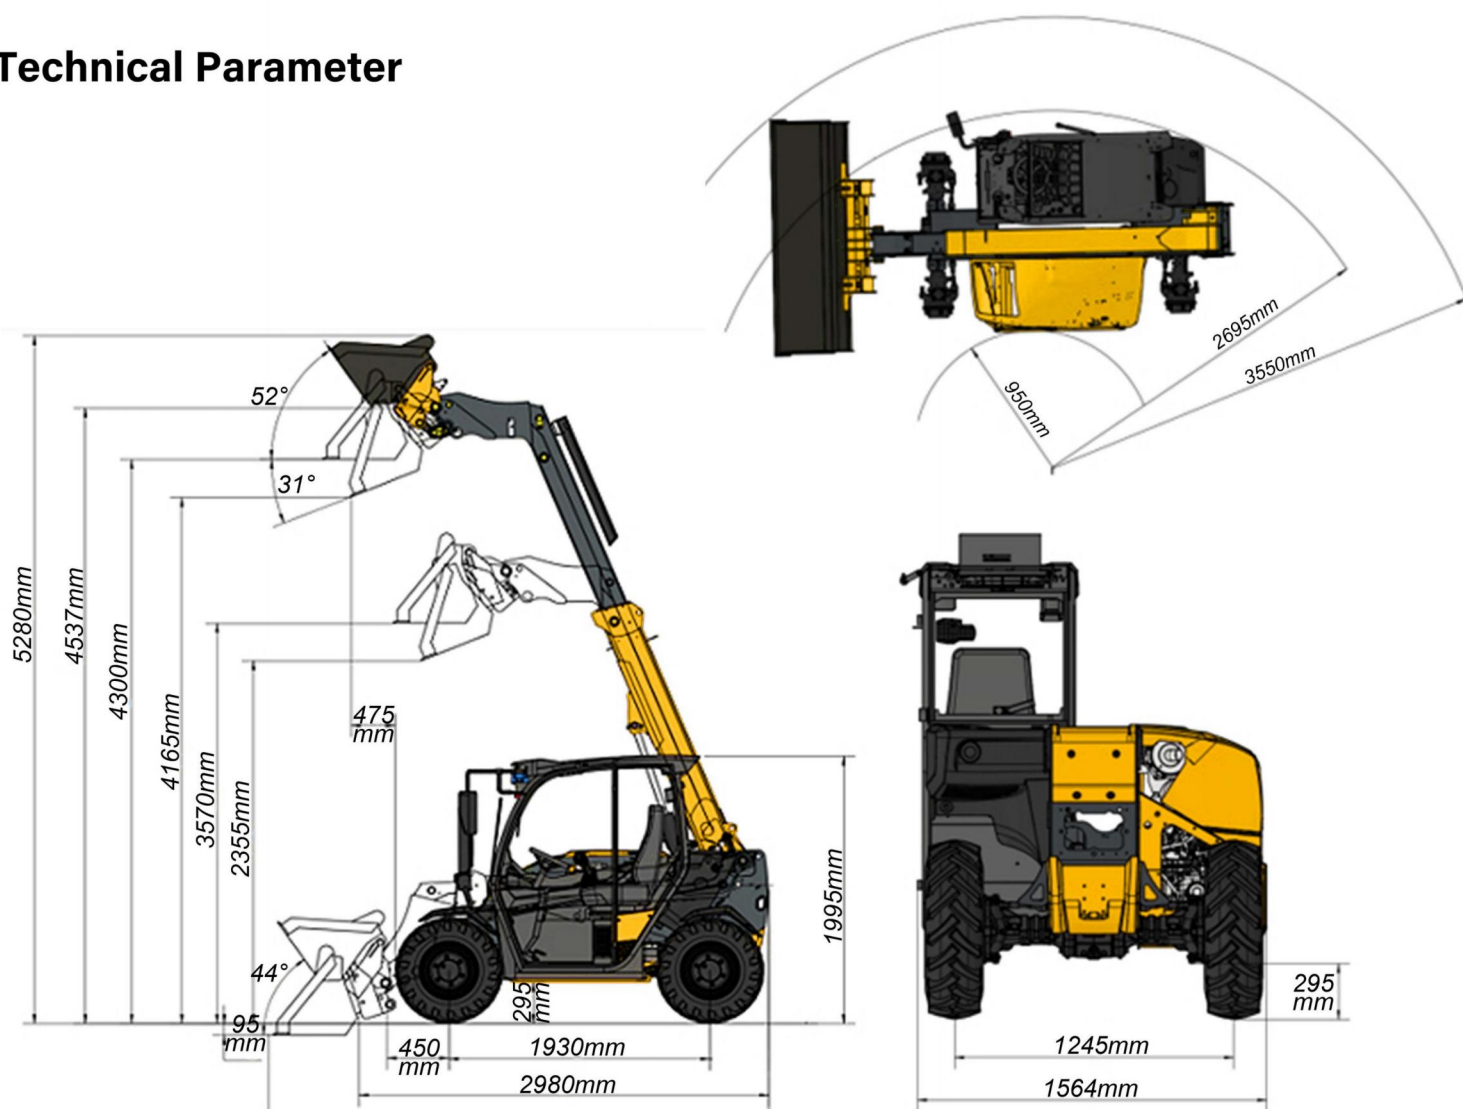


Specifications

Engine Model:	Yanmar 3TNV86CT
Rated power / speed (kw):	32.4KW/3000r/min
Max. payload (kg):	1500
Operating weight:	2750
Bucket capacity:	0.45
Maximum torque:	107
Displacement (L):	1.6
Speed first gear (km):	0-8km/h
Speed second gear (km):	0-20km/h
Discharge volume (L):	54
Work pump:	Gear pump
Tires:	10.0/75-15.3 or 29X12.5-15
Axle:	Planetary-steering drive axle
Type:	Hydrostatic via universal joint shaft



The quick-change system

Pull up to the attachment, pick up the attachment from the driver's seat and lock it hydraulically on the joystick using the roll button. The locking cylinder is located outside the pivot point of the quick release plate.

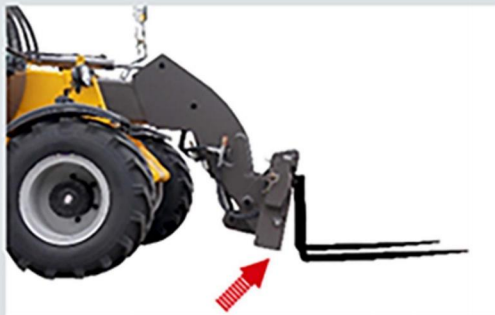

Pleasant working environment



From the inside, the cabin impresses with its first-class space, excellent all-round visibility and many other details, such as the interval wiper, the tilt and height adjustable steering column, the optional shelf with cooling option or the radio with DAB+ and Bluetooth hands-free system. The optional air conditioning and air suspension seat make it even more comfortable for long working days.


Three steering models



- Two-wheel steer is perfect for roading
- Four-wheel steer provides great manoeuvrability in tight space
- Crab steer is designed to edge your telehandler either close to or away from walls

Wolf Telehandler 1240P

Product Features

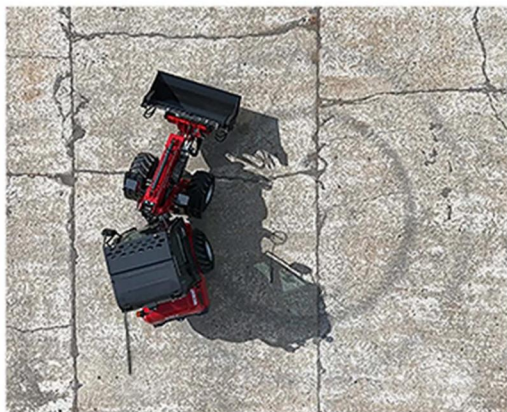

Compact Dimensions

Under 2 m tall and wide, excel in confined spaces. Their small internal radius enhances maneuverability and versatility on job sites.



Sturdy Telescopic Arm

The telescopic arm is centrally positioned for stability, featuring a hydraulic parallel guide and maintenance-free sliding elements, which reduce wear and prolong service life.




Adjustable Steering Wheel And Column

The steering wheel and column can be adjusted in height and incline, allowing operators to work ergonomically and with focus.



Ergonomic Joystick

The joystick offers secure, sensitive control over key functions, enabling one-handed operation of various controls. This enhances comfort and efficiency during extended use.

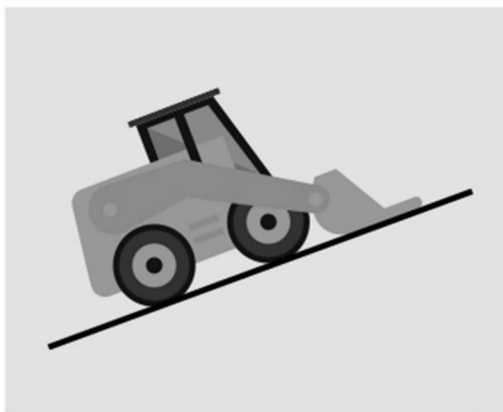

Electric parking brake

The electric parking brake activates automatically for safety when stationary and can be manually controlled, providing auto-hold to prevent rolling and allowing operator flexibility.



Efficient Change Of Attachments

The hydraulic quick hitch allows fast, safe attachment changes and quick machine resumption, enhancing productivity and efficiency.



Easy-To-Read Digital Display

The digital display shows key functions, including temperature, fuel volume, and active features like electrical operations and the differential lock.



High Flow Performance Hydraulics

The machine can be equipped with high-flow hydraulics for front attachments with high oil demands, extending its application range.



Three Types Of Flexible Steering

The machine offers three steering types for maximum maneuverability: all-wheel, front axle, and crab steering.